



Topcem



**Special hydraulic binder
for normal setting,
fast drying and
shrinkage controlled
screeds manufactured
to BS 8204-1**



WHERE TO USE

Formation of bonded, unbonded and floating or heated screeds on both existing and new concrete prior to the installation of wood, PVC, linoleum, ceramic tiles, natural stone, carpet or any other flooring where rapid drying is required for short installation times.

Suitable for indoor and outdoor use.

Some application examples

- Formation of screeds set to light foot traffic after 12 hours.
- Formation of screeds on which ceramic tiles can be laid after 24 hours.
- Formation of screeds on which natural stone can be laid after 2 days.
- Formation of screeds on which resilient flooring and wooden flooring can be laid after 4 days.
- Patching and repairing floor screeds where rapid restoration is required.
- Preparation of screeds incorporating underfloor heating systems without the need for polymer additives.

TECHNICAL CHARACTERISTICS

Topcem is a special hydraulic binder which, when mixed with graded aggregates and water, can produce an early drying high strength screed ready to receive floor finishes between 24hrs and 4 days. **Topcem** is defined within BS 8204 -1 section 5.1.3 part f.

USES

- High traffic areas such as airports, shopping centres, schools, hospitals etc.
- Fast track construction where the screed needs to be trafficked or overlaid early.
- Suitable for thin resin or cementitious systems such as **Mapecem** or **Ultratop**.
- Suitable for underfloor heating systems.

- Suitable for use where BRE screed test category A or B is required.

RECOMMENDATIONS

- Do not mix **Topcem** with other cement, lime, gypsum or **Mapecem** etc.
- Do not leave **Topcem** dry-mixed with aggregates, immediately add the correct quantity of water to the mix.
- Do not mix **Topcem** just with fine sand, use aggregates graded to BS EN 13139 0/8.
- Do not mix **Topcem** with an excessive quantity of water.
- Do not add water and remix **Topcem** after it has started to set.

APPLICATION PROCEDURE

Preparing the substrate

All substrates are suitable for receiving a **Topcem** screed. For unbonded screeds isolate the substrate with a sheet of polyethylene or similar; in the case of rising damp provide a suitable waterproof membrane. For bonded screeds the substrate must be dry, resistant to compression and tension, free from cracks, dust, loose material, oil, paint, wax and traces of gypsum. For other types of substrates consult MAPEI's Technical Services Department.

UNBONDED SCREEDS (min 35 mm thick)

Preparing the mix

Carefully mix the **Topcem** with graded aggregates 0/8 mm in diameter and water, in a mixer or screed pump for at least 5 minutes.

The mix must be spread, tamped and levelled in the shortest possible time and in any event not more than an hour after preparation. Particular care must be taken with the quantity of water which must be such as to obtain a mix with a "damp earth" consistency that under a float finish

Topcem

will compact to produce a closed and smooth surface without water bleed.

Topcem, aggregates and water can be mixed using:

- a forced action mixer;
- an ordinary concrete pan mixer;
- a screw mixer;
- an automatic pressureised screed pump.

Mixing manually with a shovel is not recommended as it does not permit good dispersion of the **Topcem** components resulting in the need to increase the quantity of water in order to obtain the right mix. Where it is not possible to use a mechanical mixer and for small areas that require mixing by hand, it is recommended to thoroughly dry mix the **Topcem** with the aggregates before adding the water in small amounts, turning the mix until a "damp earth" consistency is obtained.

RECOMMENDED DOSAGE

Topcem binder 250 kg/m³

Recommended mix design:

0/8 mm aggregate 1750 kg/m³
Topcem binder 250 kg/m³
Water 100 kg/m³

Note: Water content may vary according to the moisture content of the aggregate.

Spreading the mix

The **Topcem** mix should be spread in the same way as a normal screed. A polyethylene isolating sheet (or other similar material) must be laid to create a separating layer between the screed and the supporting substrate.

This separating layer also provides the function of a vapour barrier, preventing damp rising from the substrate and also dehydration of the **Topcem** screed due to rapid absorption of water; the absorbed water, rising subsequently would retard the drying process.

Topcem screeds are prepared using the same techniques as for ordinary cement screeds, preparing levelling strips, laying the mix, carefully compacting it and then tamping for the required surface finish.

Where it is necessary to incorporate piping or sheathing in the **Topcem** screed the upper layer which must not be less than 25 mm thick, should be reinforced with galvanized steel mesh of not more than 30x30 mm.

Around the perimeter of the area and around columns etc., it is advisable to form an expansion joint about one centimetre wide between the wall and the screed with a flexible material (such as polyethylene, felt board, cork, polystyrene, etc.).

If the installation of the screed is interrupted away from a construction joint cut the day joint in the screed straight down and insert pieces of 3-6 mm diameter, steel rods 20-30 cm long. They should be spaced 20-30 cm apart to ensure perfect bonding and to avoid cracks and differing levels when work is resumed.

On average there is more time available for laying and working with Topcem screeds compared to traditional cement screeds. However the ambient temperature influences the setting and drying times.

BONDED SCREEDS (Min 10mm thick)

Preparing the mix, proportions and spreading the mix are exactly the same as for unbonded screeds, but first apply a **Planicrete** bonding slurry onto the perfectly clean substrate.

DOSAGE OF THE BONDING SLURRY

Planicrete	1 part by weight
Water	1 part by weight
Topcem	3 parts by weight

To ensure adhesion, spread the slurry onto the surface to be covered immediately before the **Topcem** screed (fresh screed on fresh slurry).

Note: For thicker section bonded screeds over 50mm use **Eporip Epoxy Bonding Agent**.

FLOATING SCREEDS (min 55 mm thick)

The screed mix is prepared and applied in the same way as an unbonded screed.

Mapefibre NS12 may be added to the screed at 120 g/Bag of **Topcem** as an additional measure.

The insulation should have a high resistance to compression and not depress more than 3 mm under the anticipated final load.

Where underfloor heating pipes are incorporated, they should be located a minimum of 25 mm below the surface of the screed. Additionally reinforcing mesh if used, should be placed over the pipes.

The underfloor heating may be commissioned after 4 days.

Note: For under floor heating systems the screed must contain either additional reinforcing mesh or **Mapefibre NS12** fibres.

MEASURING THE MOISTURE CONTENT

Because of the particular composition and character of **Topcem**, ordinary electric moisture meters do not give reliable values; residual moisture can only be recorded with a carbide hygrometer.

Cleaning

Tools can be cleaned with water.

CONSUMPTION

Consumption varies in relation to the thickness of the screed and the dosage of **Topcem**.

For doses of 200-250 kg of **Topcem** per m³ of aggregate consumption is 2-2.5 kg/m²/cm of thickness.

PACKAGING

20 kg paper sacks.

STORAGE

Topcem can be stored for 12 months in a dry place in the original packaging.

Quality Systems

Manufactured in the UK by Mapei UK Ltd under quality control procedures assessed to EN ISO 9001.

The product complies with the conditions of Annex XVII to Regulation (EC) N° 1907/2006 (REACH), item 47.

SAFETY INSTRUCTIONS FOR PREPARATION AND INSTALLATION

Topcem contains cement that when in contact with sweat or other body fluids causes irritant alkaline reactions and allergic reactions to those predisposed. It can cause damage to eyes. It is recommended to use protective gloves and goggles and to take the usual precautions for handling chemicals. If the product comes in contact with the eyes or skin, wash immediately with plenty of water and seek medical attention.



Mixing Topcem in a mini-batcher



Mixing Topcem with an automatic pumping unit



Batching a Topcem mix

TECHNICAL DATA (typical values)

PRODUCT IDENTITY

Consistency:	powder
Colour:	grey
Dry solids content (%):	100
EMICODE:	EC1 R Plus - very low emission

APPLICATION DATA (at +23°C - 50% R.H.)

Mixing ratio:	250 kg of Topcem with 1 m ³ of aggregate (diameter from 0-8 mm)
Density of the mix (kg/m ³):	2100
Mixing time:	5-10 minutes
Working time of mix:	60 minutes
Application temperature:	from +5°C to +35°C
Set to light foot traffic:	after 12 hours
Ready for use:	4 days
Application of levelling compound:	after 1-4 days
Waiting time before installation:	24 hours for ceramic tiles 2 days for stone material 4 days for resilients and for wood
Residual moisture after 4 days (%):	< 2.0

FINAL PERFORMANCE DATA

Resistance to alkalis:	excellent
Resistance to oils:	excellent (poor to vegetable oils)
Resistance to solvents:	excellent
Temperature when in use:	from -30°C to +90°C



Preparing a levelling strip



Screeding Topcem



Power floating the surface of a Topcem screed



Detail of a Topcem screed with reinforcement rods


Topcem



Spreading the anchoring slurry for bonded Topcem screeds

STRENGTH PROPERTIES EN 13892 AND MOISTURE IN SCREEDS WITH TOPCEM (20 kg), GRADED DRY AGGREGATE 0-8 mm (160 kg) AND WATER (11 kg)			
TIME (days)	COMPRESSIVE STRENGTH	FLEXURAL STRENGTH	MOISTURE at +23°C - 50% R.H. Measured on samples 4x4x16 cm
1	> 8	> 3	< 3.5
4	> 15	> 4	< 2.0
7	> 22	> 5	-
28	> 30	> 6	-

Topcem is not a rapid setting binder, therefore workability is like a normal cement screed.

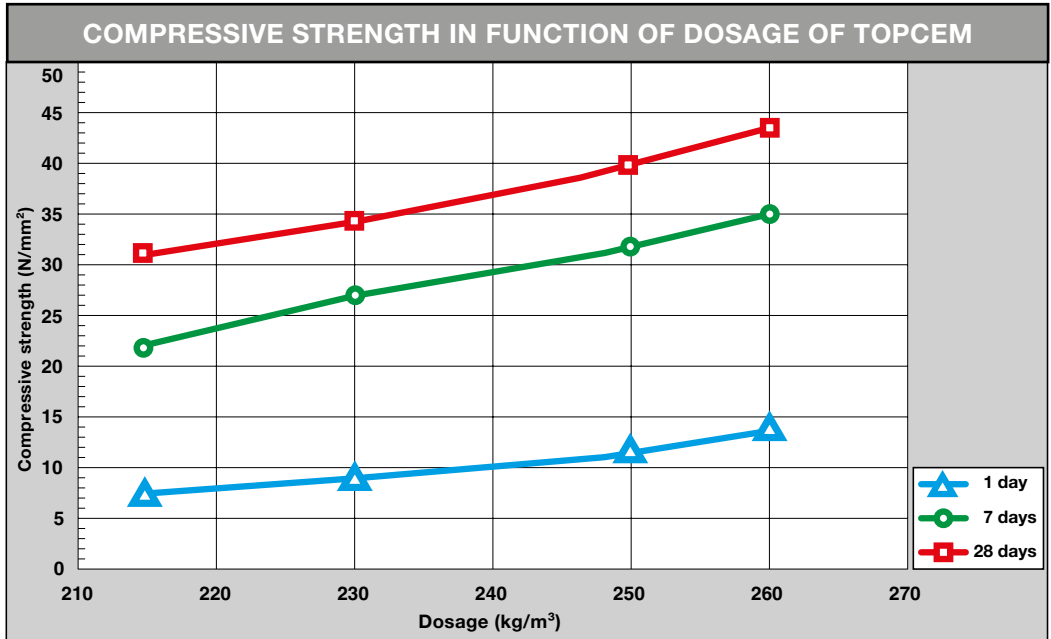

For further and complete information about the safe use of our product please refer to the latest version of our Material Safety Data Sheet.

PRODUCT FOR PROFESSIONAL USE.

N.B.

Whilst we try to ensure that any advice, recommendations or information given in our literature is accurate and correct, we have no control over the circumstances in which our product is used. It is therefore important that the end users satisfy themselves that the product and conditions are suitable for the envisaged application.

No warranty can be given or responsibility accepted other than, that the product supplied by us will meet our written specification. End users should ensure that our latest product data and safety information sheets have been consulted prior to use.

Please refer to the current version of the Technical Data Sheet, available from our website www.mapei.com

LEGAL NOTICE

The contents of this Technical Data Sheet ("TDS") may be copied into another project-related document, but the resulting

document shall not supplement or replace requirements per the TDS in effect at the time of the MAPEI product installation. For the most up-to-date TDS and warranty information, please visit our website at www.mapei.com. ANY ALTERATIONS TO THE WORDING OR REQUIREMENTS CONTAINED IN OR DERIVED FROM THIS TDS SHALL VOID ALL RELATED MAPEI WARRANTIES.



This symbol is used to identify Mapei products which give off a low level of volatile organic compounds (VOC) as certified by GEV (Gesellschaft Emissionskontrollierte Verlegewerkstoffe, Klebstoffe und Bauprodukte e.V.), an international organisation for controlling the level of emissions from products used for floors.



Our Commitment To The Environment
MAPEI products assist Project Designers and Contractors create innovative LEED (The Leadership in Energy and Environmental Design) certified projects, in compliance with the U.S. Green Building Council.

All relevant references for the product are available upon request and from www.mapei.com



BUILDING THE FUTURE

Any reproduction of texts, photos and illustrations published here is prohibited and subject to prosecution

207-9-2015 (UK)